



# HANSEN SPC FLOORING


Technical Data Specification Sheet

A range of realistic timber tones to create dramatic visual impact and sophisticated elegance in any space. A robust, durable, slip resistant and waterproof flooring solution that can withstand the Kiwi lifestyle.

## PRODUCT DETAILS

<b>Plank Width</b>	228mm
<b>Plank Length</b>	1830mm
<b>Total Thickness</b>	8mm
<b>Core Thicknes</b>	6mm rigid SPC
<b>Wear Layer</b>	0.5mm
<b>Backing Layer</b>	1.5mm
<b>Coverage per Box</b>	2.08m <sup>2</sup>
<b>Planks per Box</b>	5 Planks / Lengths
<b>% of Formaldehyde</b>	100% Free
<b>Edges</b>	Micro Bevel
<b>Installation</b>	Uniclic® drop & lock
<b>Warranty</b>	20 years *T&C's apply

## COMPOSITION OF BOARD

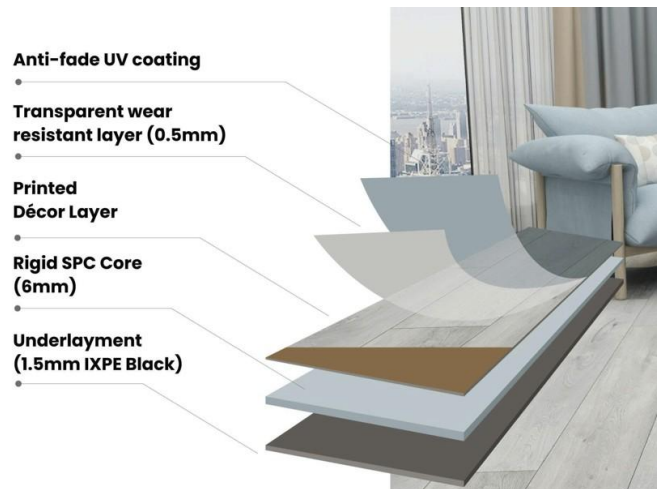

## SPECIFICATION TECHNICAL DETAILS

<i>Technical Spec</i>	<i>Standard of Measurement</i>	<i>Unit</i>	<i>Result</i>
<i>Straightness</i>	ASTM F3261	mm	0.15 mm
<i>Squareness</i>	ASTM F3261-17	mm	0.10 mm
<i>Overall Thickness</i>	EN ISO 24337	mm	8
<i>Wear Layer</i>	EN ISO 24337	mm	0.5
<i>Scratch Resistance</i>	EN ISO 1518	-	>2000
<i>Slip Resistance</i>	EN 13893:2002-11	-	Class DS
<i>Slip Resistance (Inclined)</i>	DIN 51130	-	R10
<i>Stain &amp; Chemical Resistance</i>	EN ISO 26987	-	Pass – No change
<i>Formaldehyde Emission</i>	EN 717-1:2004-10	-	E1 – None Detected
<i>Reaction to Fire Performance</i>	EN ISO 9239-1:2010-06	-	Bfi-s1
<i>Waterproof</i>	ISO 4760:2022 E	-	Impervious to moisture
<i>Curling</i>	EN ISO 23999	mm	<0.9 mm
<i>Colour Fastness</i>	ISO 105-B02:2014	-	<=6
<i>Castor Chair Test</i>	ASTM D6962	-	Pass

Hansen Timber’s SPC Flooring features a pre-installed acoustic underlay and patented uniclic installation system with a stunning range of designer colours available to make your vision come to life. A modern, waterproof flooring solution ideal for any Home or Commercial space.

